

DM-115PW

15.6" FHD 16:9 PCAP Modular Touch Monitor



Applications

- HMI Solution
- Industrial Automation
- Digital Transformation
- Indoor Ticketing Kiosk
- Security and Surveillance

Features

- Patented Display Conversion Device (DCD) Technology
- Designed with Aluminum Die-casting Ultra-Thin Front Frame
- IP65 True Front Panel for Waterproof and Dustproof
- Projected Capacitive Touchscreen
- 1920 x 1080 Resolution and 450nits Brightness
- Connectors for Display On/Off and External OSD Control
- 2 x 2W Internal Speakers
- -20°C to 60°C Operating Temperature



Ordering Information

Part No.	Description
DM-115PW	15.6" 16:9 FHD (1920x1080), 450nits, PCAP Touchscreen


Packing List

Description
1 x DM-115PW
Panel Mount Kits

Specifications

Model		DM-115PW
Display	Panel Size	15.6"
	Panel Type	LCD Panel
	Aspect Ratio	16:9
	Resolution	1920 x 1080 (FHD)
	Viewing Angle	170(H) x 170(V)
	Brightness	450cd/m2
	Contrast Ratio	800:1
	Color Support	16.2M
Touchscreen	Touchscreen Type	Projected Capacitive (PCAP)
	Surface Hardness	7Mohs
	Transparency	90% (±3%)
System	OSD Control	Touch Monitor On/Off, Auto, Menu, Up and Down, Multi-language OSD
	Speaker	2 x 2W Internal Speakers
Environment	Operating Temperature	-20°C to 60°C
	Storage Temperature	-20°C to 70°C
	Humidity	10%~80% (non-condensing)
	Vibration	IEC 60068-2-64: 1Grms, random, 5~500 Hz, 1hr/axis
	Shock	IEC 60068-2-27: 15G, half-sine, 11ms duration
General	Certification	CE / FCC
	Ingress Protection	IP 65 Compliant Front Panel
	Material	Front Panel Construction: Die-cast Flat Surface
	Mounting	Panel Mounting
	Dimensions (W x H x D)	393 x 254 x 29.5mm
	Net Weight	3.85kg

Dimensions

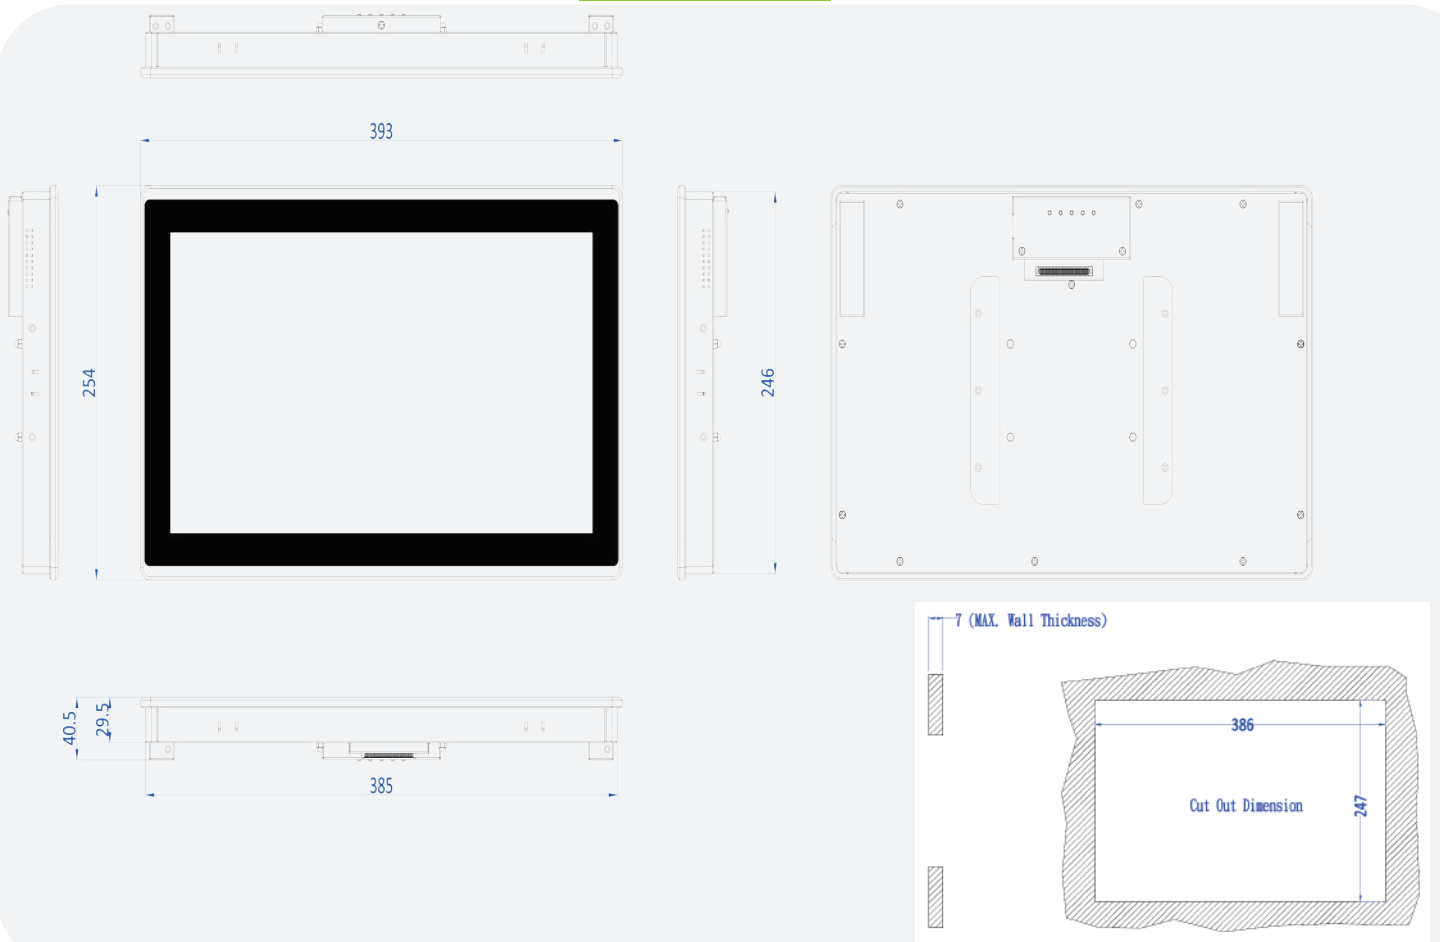


Viewing

IP65 True Front Panel for Waterproof and Dustproof

Connectors for Display On/Off and External OSD Control



PCAP Touchscreen

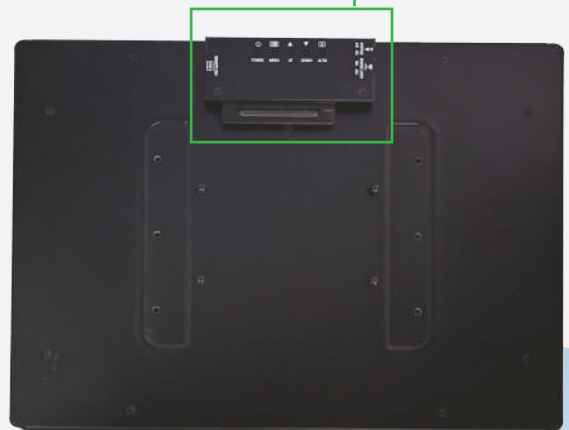

Aluminum Die-casting Ultra-Thin Front Frame