

Modular Design

Embedded  
Computing

IP Grade  
Panel PC

IP Grade  
Touch Display

# PPC-Z1064PW/RW

10.1" IP66/69K Stainless Steel Panel PC with Intel® Celeron® J6412 Processor



## Applications

- Food & Beverage Processing
- Hospitality & Catering Service
- Pharmaceutical Equipment
- Animal Feed Production
- Chemical Critical Environment

## Features

- 10.1" 1280 x 800 Resolution, 500nits Panel
- Intel® Celeron® J6412 onboard Processor
- True Flat, Easy-to-clean Front Panel Design
- Grade 304 Stainless Steel Enclosure (Grade 316 for option)
- IP66/69K Rated with M12 Connectors
- Support Projected Capacitive and Resistive Touch
- Support VESA, Yoke, and Wall Mounting

## Ordering Information

Part No.	Description
PPC-Z1064PW	10.1" 16:10 (1280 x 800) WXGA, 500nits, P-CAP Touch, Full Stainless Steel 304, Intel® Celeron® J6412, M12 Connectors (2 x GbE, 2 x RS-232/422/485, 1 x USB3.2, 1 x USB2.0 (x2), 12~36VDC)
PPC-Z1064RW	10.1" 16:10 (1280 x 800) WXGA, 500nits, 5-wire Resistive Touch, Full Stainless Steel 304, Intel® Celeron® J6412, M12 Connectors (2 x GbE, 2 x RS-232/422/485, 1 x USB3.2, 1 x USB2.0 (x2), 12~36VDC)

## Packing List

Description
1 x PPC-Z1064PW/RW

# Arestech


## Optional Items

Part No.	Description
APW-60M12V-01	Adapter AC/DC 12V 5A 60W with M12 Connector (US)
APW-60M12V-02	Adapter AC/DC 12V 5A 60W with M12 Connector (EU)
AKT-USB2M12	M12 Connector to 2-port USB2.0 Cable, 2m
AKT-USB31M12	M12 Connector to USB3.0 Cable, 1.8m
AKT-COM2M12	M12 Connector to DB9 Cable, 2m
AKT-LAN2M12	M12 Connector to LAN Cable, 2m
AWD-WF006	Wi-Fi 802.11 a/b/g/n/ac/BT4.0 (2T2R) + 2 IP66 Antennas (Dual Band), Half Size
AWD-WF007	Wi-Fi 802.11 b/g/n/BT4.0 (1T1R) + 1 IP66 Antenna (Dual Band), Half Size
ACS-Z101-SWM	Stainless Steel 304 Wall Mount Kits, Thickness 3mm for PPC-Z10XX
ACS-Z101-SYK	Stainless Steel 304 Yoke Mount Kits, Thickness 3mm for PPC-Z10XX


## Specifications

Model		PPC-Z1064PW	PPC-Z1064RW
Processor System	CPU	Intel® Celeron® J6412 Processor	
	Frequency	up to 2.60GHz	
	BIOS	UEFI	
	TPM	fTPM	
Memory	Technology	Dual Channel DDR4 3200MHz (un-buffered and non-ECC)	
	Max. Capacity	Support up to 32GB	
	Type	2 x 260-pin SO-DIMM	
Panel	Panel Type	10.1" WXGA LCD	
	Aspect Ratio	16:10	
	Resolution	1280 x 800	
	Brightness	500cd/m <sup>2</sup>	
	Color	16.2M	
	Contrast Ratio	800:1	
	Viewing Angle	170 (H) x 170 (V)	
	Backlight MTBF (typ.)	50,000Hrs	
Touchscreen	Touchscreen Type	Projected Capacitive (P-CAP)	5-wire Resistive
	Surface Hardness	7Mohs	3Mohs
	Transparency	90% (±3%)	80% (±3%)
I/O Interface	Ethernet	2 x GbE (Intel® I210-AT) (M12 Connector)	
	Serial Port	2 x RS-232/422/485 (M12 Connector)	
	USB	2 x USB2.0 (from 1 x M12 Connector) 1 x USB3.2 Gen1 (M12 Connector)	
	Audio	N/A	
Storage	2.5" SSD	Internal 1 x 2.5" SSD	
	M.2	Internal 1 x M.2 2280 M-Key (PCIe x2, SATA)	
Expansion	Mini-PCIe	1 x Full-Size Mini-PCIe with SIM slot (PCIe, USB2.0 and SIM)	
	M.2	1 x M.2 2280 M-Key (PCIe x2, SATA)	
Power	Power Mode	AT/ATX	
	Power Supply Voltage	12~36V DC Input	
	Power Connector Type	M12 Connector	
Environment	Operating Temperature	-10°C ~ +60°C	
	Storage Temperature	-30°C ~ +70°C	
	Humidity	10% ~ 95%, Non-condensing	
	Vibration	IEC 60068-2-64: 1.5Grms, random, 5~500 Hz, 1hr/axis	
	Shock	IEC 60068-2-27: 15G, half-sine, 11ms duration	
General	Certification	CE/FCC Class A	
	Ingress Protection	Full System IP66/69K	
	Material	Full SUS304 Stainless Steel (Optional SUS316)	
	Mounting	VESA (100 x 100mm) / Yoke / Wall	
	Dimensions (W x H x D)	310 x 210 x 65.5mm	
	Net Weight	3.15kg	
	Operating System	Windows 10 IoT, Windows 11 (IoT/Professional), Linux	

## PPC-Z1064PW Dimension

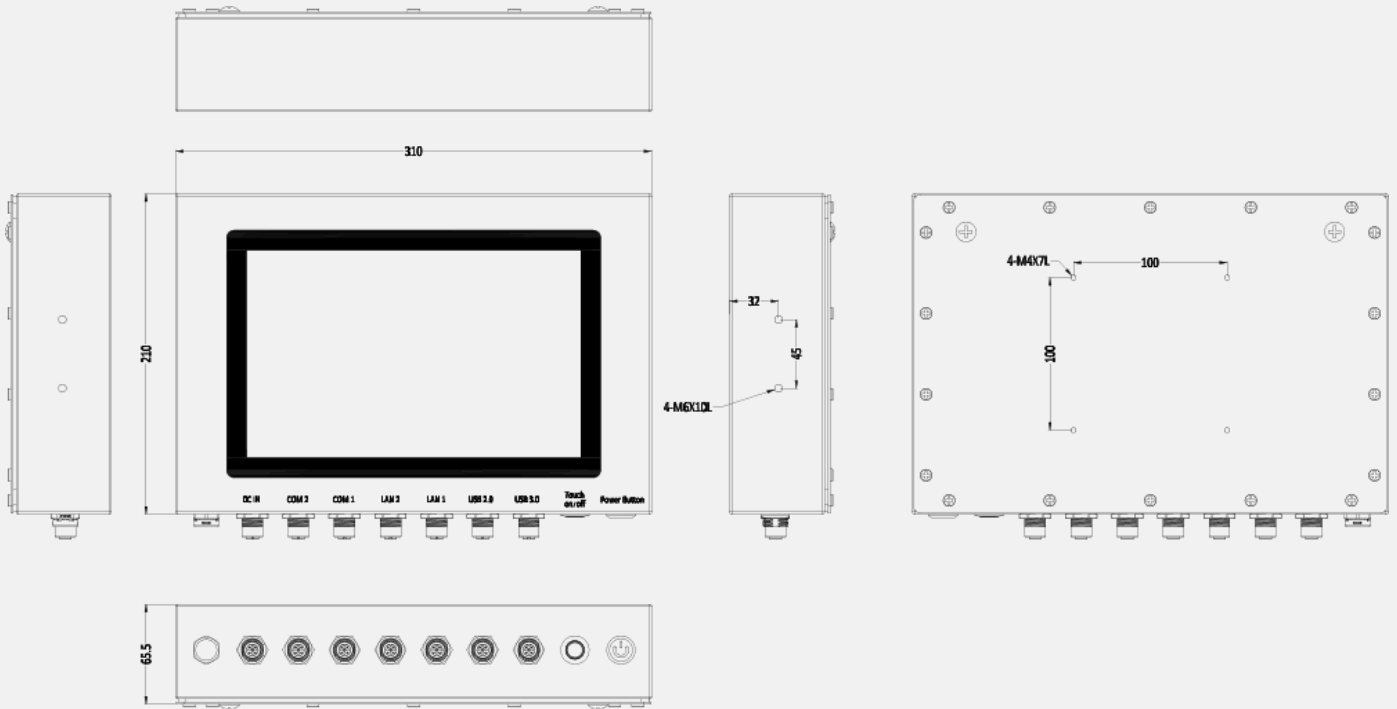

## PPC-Z1064RW Dimension

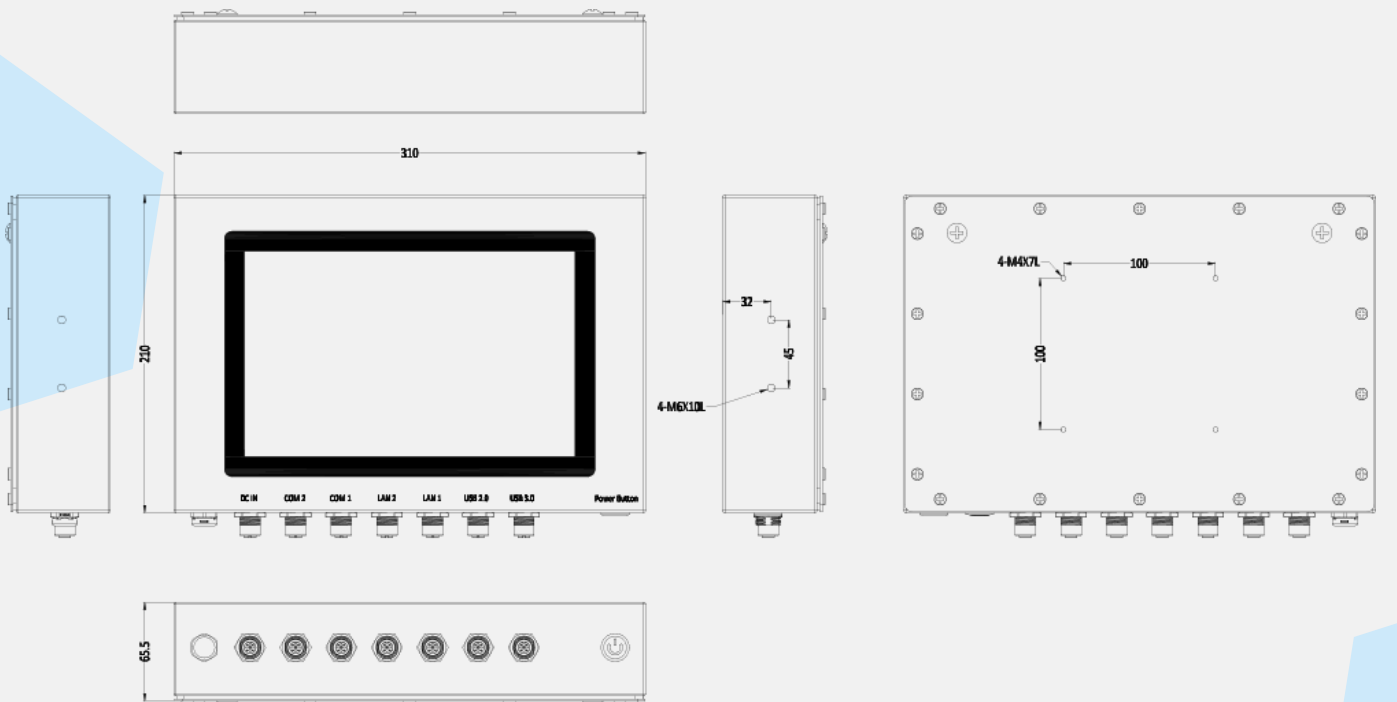

## Viewing

